


KIK-LOK ANCHOR

FOR KICKERLESS WALL CONSTRUCTION

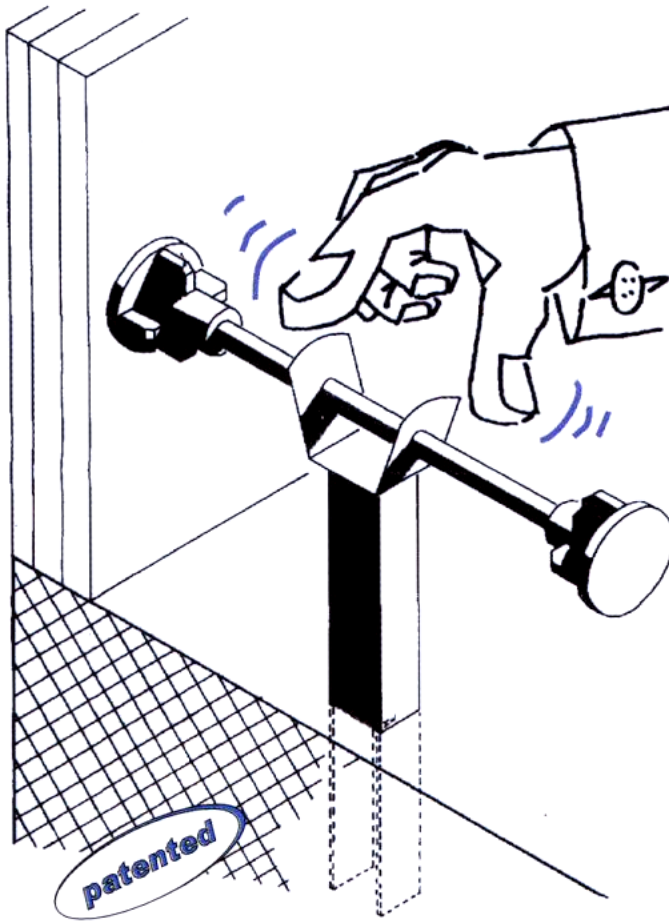

Design:

- Very Robust – Steel construction with Plastic end-caps.
- Quick and easy adjustment
- Long body giving solid fixing

Advantages:

- Ready assembled.
- No tools required.
- Unique locking system.
- Cost effective.
- Time saving.
- Eliminates costly set-up of kicker shuttering.

Method of Application:

1. Simply push the main body of the Kik-Anchor into the fresh concrete slab on the approximate centre line of wall to be formed.
2. Once the concrete has set, the spacer rod can be easily and precisely adjusted by pinching the spring mechanism to allow spacer rod to move from side to side.

Standard Sizes Available

Other sizes are available to order: _

CODE	WALL WIDTH (mm)	PACK SIZE
KLA150	150	50
KLA175	175	50
KLA200	200	50
KLA225	225	50
KLA250	250	50



Direct Chemicals
PO BOX 3786, Bracknell
Berkshire, RG12 7TH
Tel: 0118 989 2666
Fax: 0118 989 0929
Email: sales@dichem.co.uk
Web: www.dichem.co.uk

