

Nivorapid

**Ultra-fast setting,
thixotropic,
cementitious levelling
mortar for horizontal or
vertical surfaces, from
3 to 20 mm thick layer**



WHERE TO USE

Nivorapid is used for repairing, levelling and smoothing interior floors, walls, steps and arrises where very rapid hardening and drying are required.

Some application examples

- Smoothing concrete slabs and **Mapecem**, **Topcem**, **Topcem Pronto** (prime first), anhydrite, and magnesium based screeds as well as cast asphalt.
- Smoothing terrazzo, ceramic, natural stone or heated floors.
- Smoothing concrete walls, cementitious renders, foamed concrete blocks and ceramic.
- Repair or levelling steps, landings and edges of pillars.
- Filling depressions and holes in floors, walls and ceilings.

By adding **Latex Plus** to **Nivorapid**, levelling with excellent bonding strength on metal surfaces, old rubber floors, PVC, needlepunch, chipboard, parquet, linoleum or similar (see Technical data sheet n. 114) is obtained.

TECHNICAL CHARACTERISTICS

Nivorapid is a grey-brown powder composed of

cementitious binders, selected graded aggregates and synthetic additives prepared according to a formula developed in the MAPEI research laboratories.

Nivorapid mixed with water becomes an easily workable thixotropic paste with high bonding strength to substrates and rapid drying which allows subsequent installation operations for floor and wall coverings, or painting, within only 4-6 hours after application.

Nivorapid hardens without shrinkage and without the formation of cracks or crazing. It develops high compressive and flexural strength and is very resistant to impact and abrasion.

RECOMMENDATIONS

- In case of very high temperature and if more than 10 mm is needed, it is recommended to add approx. 30% graded sand 0-4 mm to avoid that the high hydration heat provokes alterations in the final characteristics of the product.
- Do not exceed the quantity of water indicated and do not add more water to a mix that has already started to harden.
- Use **Planipatch** when a particularly fine final surface is needed and for thicknesses lower than 3 mm.

Nivorapid



Nivorapid mixed with mechanical mixer



Grouting a plywood substrate with Nivorapid + Latex Plus



Repairing vertical arrise with Nivorapid

TECHNICAL DATA (typical values)

PRODUCT IDENTITY

Consistency:	fine powder
Colour:	grey-brown
Specific gravity (g/cm³):	1.4
Dry solids content (%):	100
Storage:	12 months in a dry place in original packaging
Hazard classification according to EC 99/45:	none. Safety data sheet is available upon request for professional users
Customs class:	3824 50 90

COMPOSITION AND PROPERTIES OF THE MIXTURE at +23°C - 50% R.H.

Mixing ratio:	20-22 parts water per 100 parts of Nivorapid
Thixotropic properties:	yes
Specific gravity of mix (g/cm³):	1.9-2.0
pH of mix:	approx. 12
Application temperature range:	from +5°C to +30°C
Pot life:	15 minutes
Setting time:	20 minutes
Set to light foot traffic:	approx. 2 hours
Waiting time before subsequent bonding:	after 4-6 hours

FINAL PERFORMANCES

Compressive strength (N/mm²):	
- after 6 hours:	25
- after 1 day:	30
- after 3 days:	35
- after 7 days:	37
- after 28 days:	40
Flexural strength (N/mm²):	
- after 6 hours:	4
- after 1 day:	5
- after 3 days:	7
- after 7 days:	8
- after 28 days:	10
Brinell hardness (N/mm²):	
- after 6 hours:	50
- after 1 day:	80
- after 3 days:	90
- after 7 days:	95
- after 28 days:	120

- Do not add cement, gypsum plaster or lime to the mix.
- Do not use for exteriors.
- Do not use on substrates subject to continuous rising damp.
- Do not use when the temperature is below +5°C.
- Protect from rapid evaporation on hot and/or windy days.
- Prior to use do not leave bags of **Nivorapid** exposed to sunlight for long periods of time.
- For levelling and localised grouting on wood supports, use **Nivorapid** mixed with **Latex Plus** in place of water.

APPLICATION PROCEDURE

Preparing the substrate

The substrates must be solid, dry, free of dust, loose parts, paint, wax, oils, rust and traces of gypsum.

Cement based surfaces that are not sufficiently solid must be removed or where possible consolidated with **Prosfas**, **Primer EP** or **Primer MF**.

Spread dry sand or **Quartz 1.2** over the surface immediately after the treatment of one of the above mentioned products.

Cracks and fissures in the substrate must be repaired with **Eporip** or **Eporip Turbo**.

In order to fix dust and to provide uniform absorbency of the substrate, dusty or very porous concrete surfaces must be treated with a coat of diluted **Primer G** (1 kg of **Primer G** with 1-3 kg of water) or **Livigum** (1 kg of **Livigum** with 5 kg of water).

Anhydrite screeds can be levelled with **Nivorapid** only after the application of a coat of **Primer G** or **Primer EP** over the surface that will be covered with sand. On existing ceramic or natural stone surfaces apply a coat of **Mapeprim SP** or **Mapeprim 1K** after the surfaces have been cleaned with detergents and mechanically abraded. Level before **Mapeprim SP** or **Mapeprim 1K** has dried completely (it must still be impressionable).

Preparing the mix

While mixing with a low speed electric mixer, pour a 25 kg bag of **Nivorapid** into a bucket containing 5 litres of clean water and mix until a uniform lump-free paste is obtained. The quantity of **Nivorapid** mixed in each batch should

be used within 15 minutes (at a temperature of +23°C).

Applying the mix

Apply the mix with a long metal trowel. When it is necessary to apply several coats in rapid succession proceed with subsequent coats (distanced about 20-30 minutes according to the temperature and the absorption rate of the substrate).

The surface of **Nivorapid** is ready to receive ceramic tile coverings already after 4-6 hours. Wooden and resilient floors can be laid after 24 hours.

Cleaning

While it is still fresh **Nivorapid** can be removed from hands and tools with water.

CONSUMPTION

1.6 kg/m² per mm of thickness.

PACKAGING

Nivorapid is available in 25 kg bags and 4x5 kg packs.

STORAGE

Stored in a dry place **Nivorapid** is stable for at least 12 months.

A prolonged storage of **Nivorapid** could, over time, shorten setting time, without however altering its final characteristics.

SAFETY INSTRUCTIONS FOR THE PREPARATION AND APPLICATION

Contains cement, that in contact with sweat or other body fluids produces an irritant alkaline reaction. Use protective gloves and goggles. For further information consult the safety data sheet.

FOR PROFESSIONALS.

WARNING

N.B. - Although the technical details and recommendations contained in this product report correspond to the best of our knowledge and experience, all the above information must, in every case, be taken as merely indicative and subject to confirmation after long-term practical applications: for this reason, anyone who intends to use the product must ensure beforehand that it is suitable for the envisaged application: in every case, the user alone is fully responsible for any consequences deriving from the use of the product.

**All relevant references
of the product are available
upon request**



Filling holes with Nivorapid




Levelling of existing floor with Nivorapid



Repairing horizontal arises with Nivorapid

Nivorapid

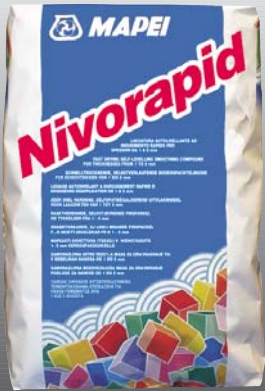

Steps before and after being treated with Nivorapid



BUILDING THE FUTURE

MAPEI GROUP CERTIFIED MANAGEMENT SYSTEMS (Quality, Environment and Safety)

 CERTIFIQUALITY No. 250	 The Mapei Environmental Management System ISO 14001 Plant in Robbiano di Mediglia CERTIFIQUALITY No. 1230	 The Mapei Environmental Management System ISO 14001 Plant in Latina CERTIFIQUALITY No. 6127	 VERIFIED ENVIRONMENTAL MANAGEMENT SYSTEM PLANT IN ROBBIANO DI MEDIGLIA	 OCCUPATIONAL HEALTH AND SAFETY MANAGEMENT SYSTEMS OHSAS 18001 CERTIFIED BY CERTIFIQUALITY PLANT IN ROBBIANO DI MEDIGLIA Certificate No. 3596	 CERTIFIQUALITY No. 3358	 CERTIFIQUALITY No. 03 0063 SJ	
MAPEI S.p.A. - ITALY				MAPEI FAR EAST Pte Ltd MAPEI MALAYSIA SDN BHD		MAPEI s.r.o. - CZECH REP.	
 CERTIFIQUALITY No. 1517	 QMI No. 004157	 DNV No. 94-OSL-AQ-6236	 The Mapei Environmental Management System ISO 14001 Plant in Sagstua DNY No. 2002-OSL-SYMI-8147	 VERIFIED ENVIRONMENTAL MANAGEMENT SYSTEM PLANT IN SAGSTUA	 DNV No. 12026-2002 AQ-BUD-TGA	 IRAM No. AR-QS-688	 CERTIFIQUALITY No. 5776
MAPEI FRANCE	MAPEI INC - CANADA	RESCON MAPEI AS - NORWAY		MAPEI KR. - HUNGARY	MAPEI ARGENTINA S.A.	MAPEI SUISSE SA	

www.mapei.com